


12" INTEGRAL SERIES WITH 3" DN VALVES

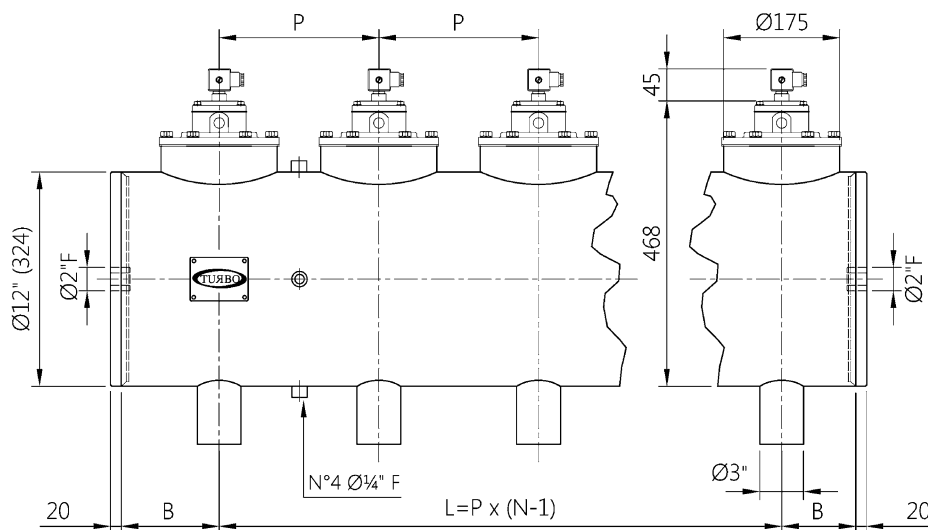

P min = 215 / B min = 125



For special versions of P min and B min, please contact our technical department

DESCRIPTION

TI080(N-V-T)P / TI080(N-V-T)M

1	Coil - Connector	BH10 V## / V##
2	Screws - Washers	TKITVTE06X20X4
3	Pilot unit	1331080
4	Pilot cover	1251750
5	Remote cover	1251770
6	Secondary diaphragm (N-V-T)	TKISM025N Neoprene TKISM025V Viton TKISM025T Low temperature
6a	Diaphragm spring	3241002
7	Screws - Washers	TKITVTE10X25X6
8	Cover	1251850
9	Diaphragm spring	3241024
10	Primary Diaphragm (N-V-T)	TKISM080N Neoprene TKISM080V Viton TKISM080T Low temperature

V## / V## = 24 Vdc - 24 Vac - 115 Vac - 230 Vac

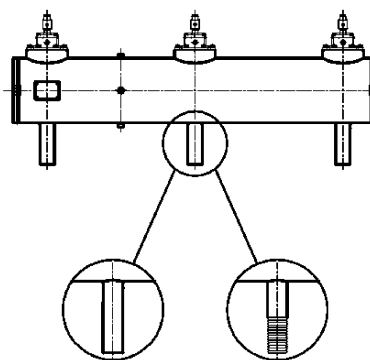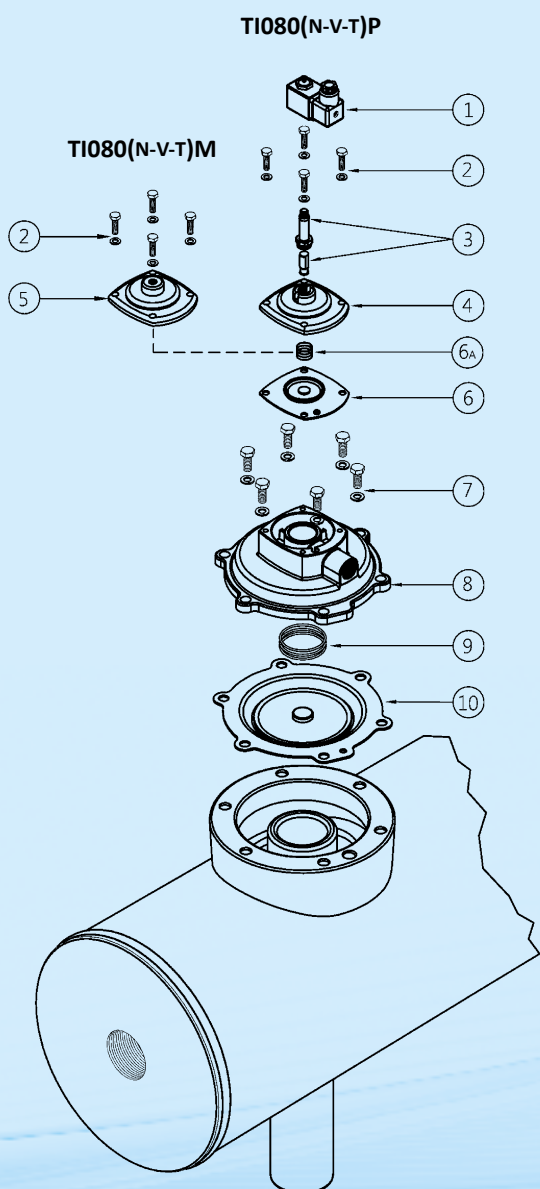

The customer is responsible for the size and type of outlet pipe